



# Primary Lithium Battery

## CP223565

3.0V [Li-MnO<sub>2</sub>]



### BENEFITS

- High Voltage Response, Stable During Most of the Lifetime of the Application
- Energy Density up to 830Wh/L
- Wide Operating Temperature Range (-40°C ~+70°C)
- Low Self-discharge Rate (less than 1% per year after 1 year of storage at +25°C)

### KEY FEATURES

- Optimized Battery Structure, Full Discharge Capacity
- Long Endurance
- No Passivation
- GB 8897.4-2008、IEC 60086.4:2014 and RoHS

### MAIN APPLICATIONS

- Security System
- Smart Metering
- RFID and Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

### References Data

#### Electrical characteristics

Open circuit voltage (at 23±2°C)	3.10V
Nominal capacity	750mAh
(At +25°C, battery discharged at continuous current 5mA until voltage reaches cut-o voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-o voltage.)	
Maximum continuous current	300mA
(At +25°C, 2.0V cut-o , battery discharged for minimum 50% of rated capacity.)	
Maximum pulse discharge current	500mA
(At +25°C, 2.0V cut-o , battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break. Discharge capacity of the battery will change with the pulse characteristics and ambient temperature as well as storage situation. For more detail, please inquiry HCB.)	
Storage (recommended)	+30°C
(For more severe conditions. Consult HCB)	
	75%RH
Operating temperature range	-40°C~+70°C
(Operation above ambient temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses, consult HCB.)	

# Primary Lithium Battery CP223565

3.0V [Li-MnO<sub>2</sub>]




**HCB**  
昊诚锂电

## Physical characteristics

Width	34.0±1.0mm
Height	65.0±1.0mm
Thickness	2.5±0.2mm
Typical weight	6.0g
Li metal content	0.32g

MSDS as per request  
Diode (1N4007, 1N5819)  
PTC (SRS175...)

Tag, wire, connector, etc. available

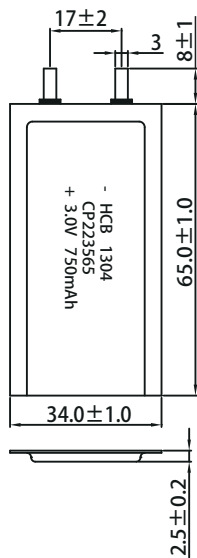

Dimensions in mm (GB1804-m)

## WARNING:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact HCB for the latest information

## HCB BATTERY CO., LTD

Add: 37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China

P.O.: 430040

Tel: +86(0)27 83248452


Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com


Web: www.cnhcb.com

No.: HCB-MKT.PM-S[V2.1 2024 05]

1. Typical discharge profiles at 23±2°C (at mid-discharge)

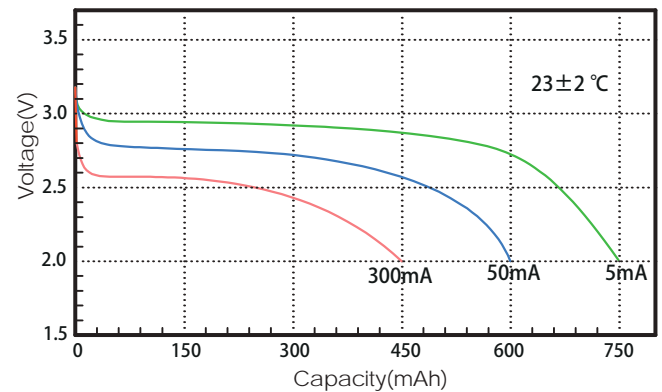

2. Voltage plateau versus Current and Temperature (at discharge stable phase)

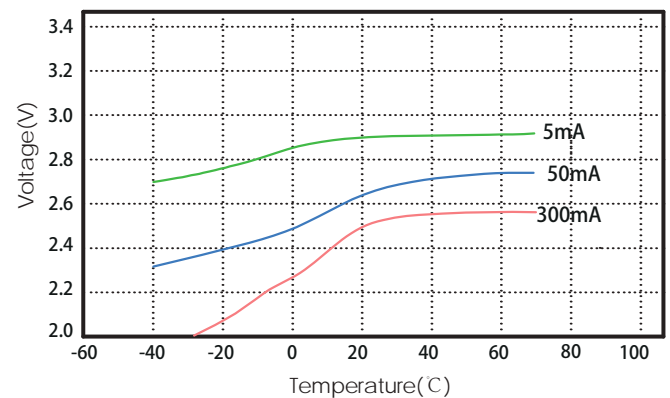

3. Storage characteristics

