



# Primary Lithium Battery

## CP305050

3.0V [Li-MnO<sub>2</sub>]



### BENEFITS

- High Voltage Response, Stable During Most of the Lifetime of the Application
- Energy Density up to 830Wh/L
- Wide Operating Temperature Range (-40°C ~+70°C)
- Low Self-discharge Rate (less than 1% per year after 1 year of storage at +25°C)

### KEY FEATURES

- Optimized Battery Structure, Full Discharge Capacity
- Long Endurance
- No Passivation
- GB 8897.4-2008、IEC 60086.4:2014 and RoHS

### MAIN APPLICATIONS

- Security System
- Smart Metering
- RFID and Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

### References Data

#### Electrical characteristics

Open circuit voltage (at 25°C)	3.10V
Nominal capacity	1800mAh
(At +25°C, battery discharged at continuous current 5mA until voltage reaches cut-o voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-o voltage.)	
Maximum continuous current	600mA
(At +25°C, 2.0V cut-o , battery discharged for minimum 50% of rated capacity.)	
Maximum pulse discharge current	1000mA
(At +25°C, 2.0V cut-o , battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break. Discharge capacity of the battery will change with the pulse characteristics and ambient temperature as well as storage situation. For more detail, please inquiry HCB.)	
Storage (recommended)	+30°C
(For more severe conditions, consult HCB)	
	75%RH
Operating temperature range	-40°C~+70°C
(Operation above ambient temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses, consult HCB.)	

# Primary Lithium Battery CP305050

3.0V [Li-MnO<sub>2</sub>]




**HCB**  
昊诚锂电

## Physical characteristics

Width	Max50.5mm
Height	Max51.0mm
Thickness	Max3.2mm
Typical weight	10.6g
Li metal content	0.63g

MSDS as per request  
Diode (1N4007, 1N5819)  
PTC (SRS175...)

Tag, wire, connector, etc. available

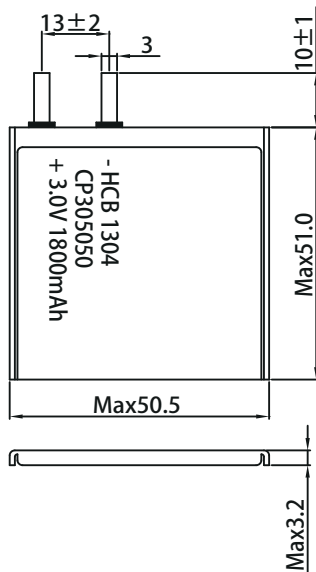


Dimensions in mm (GB1804-m)

## WARNING:


- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact HCB for the latest information


1. Typical discharge profiles at 25°C (at mid-discharge)

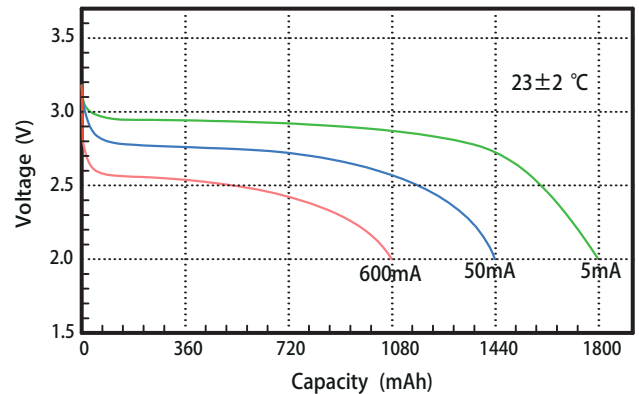

2. Typical discharge profiles with different current (at discharge stable phase)

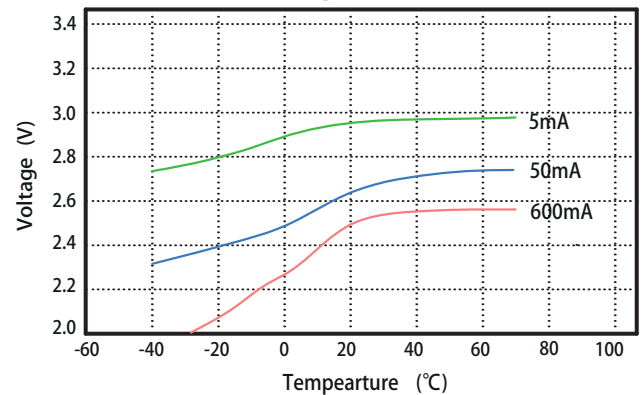

3. Storage characteristics

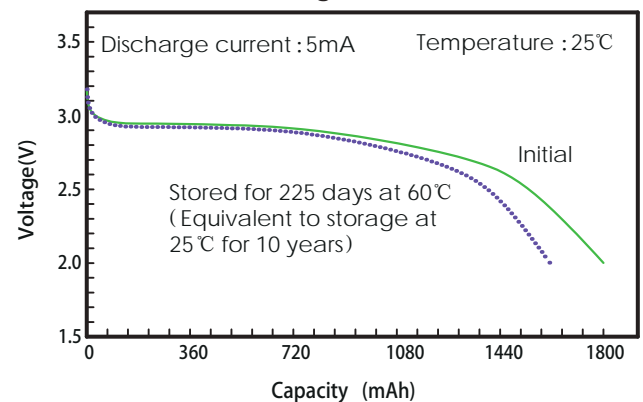

HCB BATTERY CO., LTD

Add: 37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China

P.O.: 430040

Tel: +86(0)27 83248452

Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com

Web: www.cnhcb.com

No.: HCB-MKT.PM-S[V2.0 2023 04]