

Primary Lithium Battery

CR17505

3.0V [Li-MnO₂]

A-size spiral cell

BENEFITS

- High Voltage Response, Stable During Most of the Lifetime of the Application
- Energy Density up to 830Wh/L
- Wide Operating Temperature Range (-40°C ~+85°C)
- Low Self-discharge Rate (less than 1% per year after 1 year of storage at +25°C)

KEY FEATURES

- Optimized Battery Structure, Full Discharge Capacity
- Long Endurance
- No Passivation
- GB 8897.4、IEC 60086.4 and RoHS

MAIN APPLICATIONS

- Security System
- Smart Metering
- RFID and Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

References Data

Electrical characteristics

Open circuit voltage (at 25°C) ≥3.10V

Nominal capacity 2500mAh
(At +25°C, battery discharged at continuous current 5mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

Maximum continuous current 1500mA
(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity.)

Maximum pulse discharge current 3000mA
(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break. Discharge capacity of the battery will change with the pulse characteristics and ambient temperature as well as storage situation. For more detail, please inquiry HCB.)

Storage (recommended) ≤+30°C
(For more severe conditions, consult HCB.) ≤75%RH

Operating temperature range -40°C~+85°C
(Operation above ambient temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses, consult HCB.)

Primary Lithium Battery CR17505

3.0V [Li-MnO₂]

A-size spiral cell




HCB
昊诚锂电

Physical characteristics

Diameter	Max 17.0mm
Height	Max 51.0mm
Typical weight	30.0g
Li metal content	0.72g

MSDS as per request
Diode (1N4007, 1N5819)
PTC (SRS175...)
Tag, wire, connector, etc. available

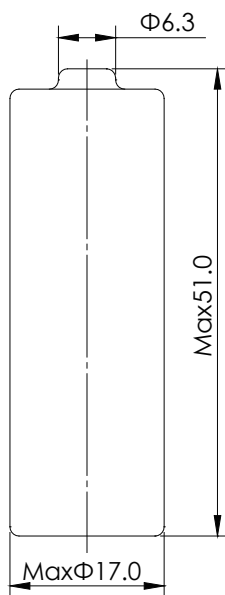

Dimensions in mm (GB1804-m)

WARNING:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact HCB for the latest information


HCB BATTERY CO., LTD

Add: 37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China


P.O.: 430040
Tel: +86(0)27 83248452
Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com
Web: www.cnhcb.com
No.: HCB-MKT.PM-S[V2.1 2024 04]


1. Typical discharge profiles at 25°C
(at mid-discharge)

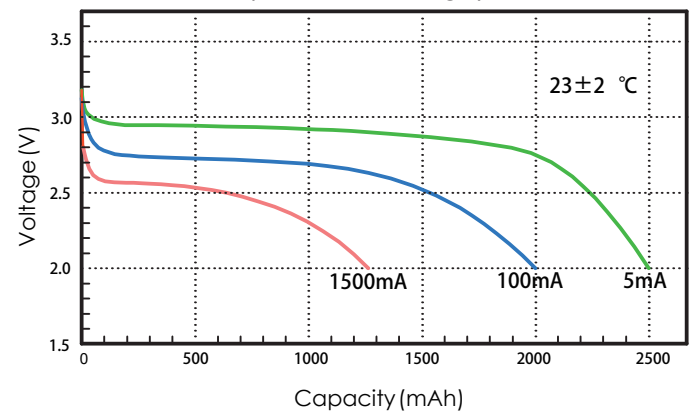

2. Voltage plateau versus Current and Temperature
(at discharge stable phase)

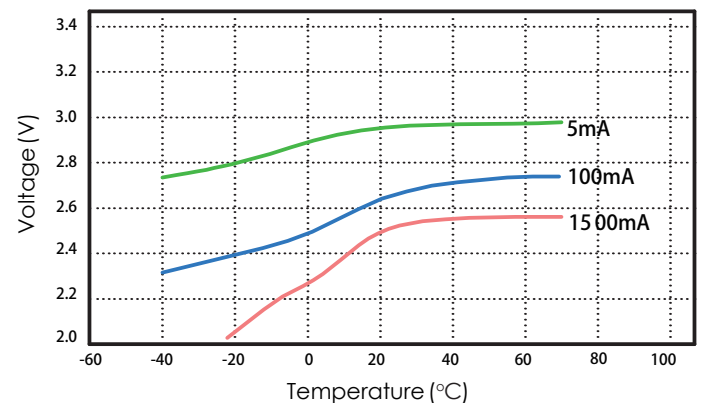

3. Storage characteristics

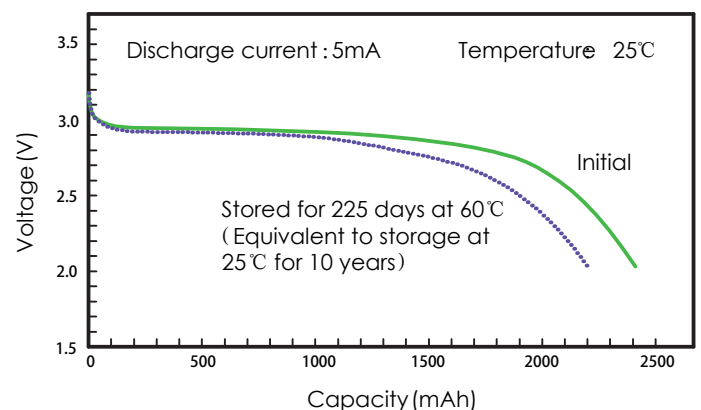

HCB BATTERY CO., LTD

Add: 37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China

P.O.: 430040
Tel: +86(0)27 83248452
Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com
Web: www.cnhcb.com
No.: HCB-MKT.PM-S[V2.1 2024 04]